



SECA-TRAC[®]

TRAFFIC MANAGEMENT

PRODUCT CATALOGUE

00

CONTENTS

01

SPEED HUMP

03

TECHNICAL PARAMETER

04

CONVEX MIRROR

05

POLE ACCESSORIES & INSTALLATION GUIDE

06

WHY STAINLESS STEEL CONVEX MIRROR

07

DOME MIRROR

08

PLASTIC/METAL BARRICADE & VEHICLE DOLLY

09

SAFETY VEST, PVC FLOOR SIGN & TRAFFIC FLAG

10

BOLLARD

11

TRAFFIC CONE

12

CONE AND ROAD BARRIER ACCESSORIES

13

CAR STOPPER & CORNER PROTECTOR

15

ROAD BARRIER & HOARDING

16

PARKING LOCK, WHEEL CHOCK/CLAMP & FENDER

17

TRAFFIC SIGNS

19

TEMPORARY TRAFFIC SIGNS

SECA-TRAC® TRAFFIC MANAGEMENT



SECA-TRAC® Rubber speed humps are raised devices, parabolic in shape, and ideally be installed in a series to create ongoing traffic calming. The speed humps are best placed at mid-intersection or roads with low speed limits.



PREMIUM RUBBER SPEED HUMP (INTERLOCKING TYPE)

Model	SH380
Size	380 x 1000 x 50mm
Weight	16.0 kg / meter



RUBBER END CAP 380

Model	SH-EC380
Size	250 x 380 x 50mm
Weight	2.5 kg / pc



RUBBER SPEED HUMP

Model	SH350
Size	350 x 500 x 50mm
Weight	14.0 kg / meter



RUBBER END CAP 350

Model	SH-EC350
Size	175 x 350 x 50mm
Weight	1.5 kg / pc

INSTALLATION METHOD



1. Clean the surface so that it is free from dirt. Place the speed hump sections and end caps into the installation position.
2. Mark the location of each hole using the pre-drilled holes as a template. Make certain the units are square and straight. Remove the sections. Use high-speed drill and drill a hole at each marked location to a minimum depth of 3" below the surface.
3. Insert one anchor into each hole. Using the hammer or mallet, tap the anchors in so they are flush with the surface.
4. Realign the sections with the pre-drilled holes. Slip washer onto bolt, tighten the nut. Repeat for each hole.
5. Finish tightening each bolt until just snug. **DO NOT OVER TIGHTEN!** Excessive tightening may damage the bump and void the product warranty.
6. Installation completed.

KEY FEATURES




- Steel washers molded into each mounting point.
- 4 nos. of clear reflectors insert per section.
- Able to withstand 5 tons of vehicle running over at 30km/h.


INTERLOCKING



Unique keyed design INTERLOCKING SYSTEM each section and enhance overall strength of the hump and reduce tearing force at each anchorage point.

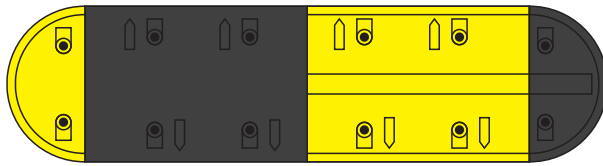


SPEED HUMP 350

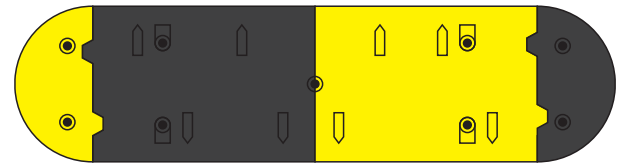


SPEED HUMP 380

SPEED HUMP 350

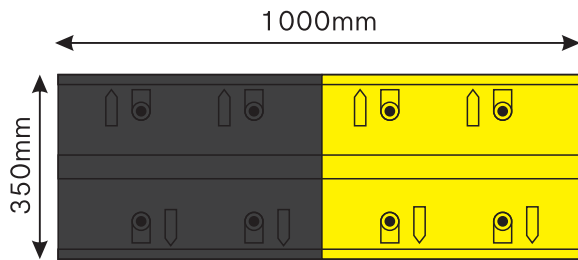


Thickness : 50mm
Weight : 14kg /meter
Material : recycle rubber

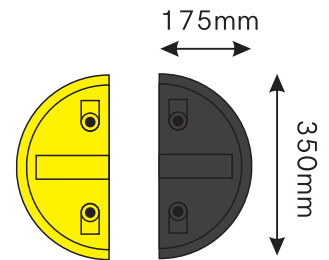


Thickness : 50mm
Weight : 1.5kg/pc
Material : recycle rubber

SPEED HUMP 380 (INTERLOCKING SYSTEM)

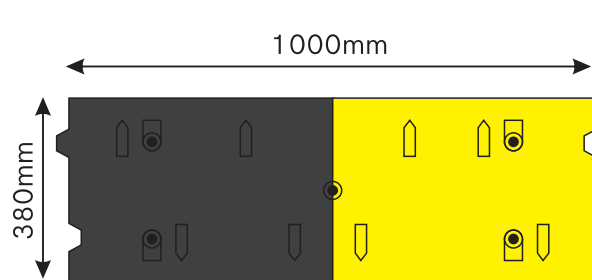

Thickness : 50mm
Weight : 16kg /meter
Material : recycle rubber


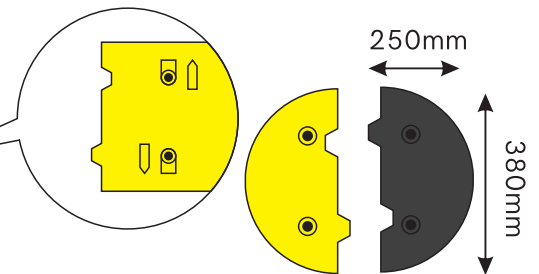


Thickness : 50mm
Weight : 2.5kg/pc
Material : recycle rubber

AVAILABLE IN THESE MATERIAL :

✓ STAINLESS STEEL

✓ POLYCARBONATE

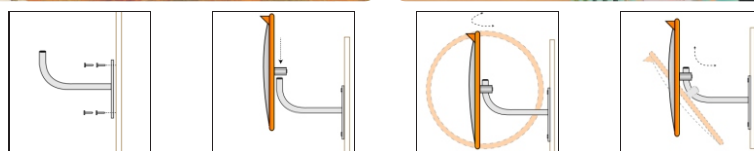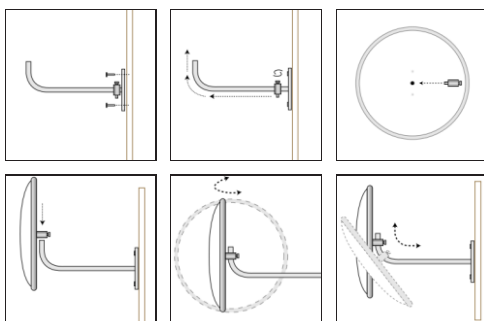

INSTALLATION METHOD OF CONVEX MIRROR (INDOOR)

- Decide the appropriate place to site the mirror to give maximum vision.
- Fix J-Bracket to wall or ceiling using suitable fixing hardware (ie: screws, bolts).
- Allowing enough room to get the mirror on to the J-Bracket.
- Thread adapter into the back of the mirror.
- Peel protective film off around the immediate edge of the mirror.
- Slide the adapter and mirror over the J-Bracket and adjust mirror to desired position.
- Tighten the locking bolt on the adapter securely.

INSTALLATION METHOD OF CONVEX MIRROR OUTDOOR)

- Decide the appropriate place to site the mirror to give maximum vision.
- Fix J-Bracket to wall or ceiling using suitable fixing hardware (ie: screws, bolts).
- Allowing enough room to get the mirror on to the J-Bracket
- Slide the adapter and mirror over the J-Bracket and adjust mirror to desired position.
- Tighten the locking bolt on the adapter securely.
- Now that installation is complete , remove the protective film from the face.


POLYCARBONATE

INDOOR		OUTDOOR	
SIZE (MM)	MODEL	SIZE (MM)	MODEL
300	PCM-IN300	600	PCM-OUT600
450	PCM-IN450	800	PCM-OUT800
600	PCM-IN600	1000	PCM-OUT1000


STAINLESS STEEL

INDOOR		OUTDOOR	
SIZE (MM)	MODEL	SIZE (MM)	MODEL
490	SSM-IN490-C	490	SSM-OUT490
600	SSM-IN600-C	600	SSM-OUT600-Z
		800	SSM-OUT800-Z
		1000	SSM-OUT1000-Z


POLE ACCESSORIES

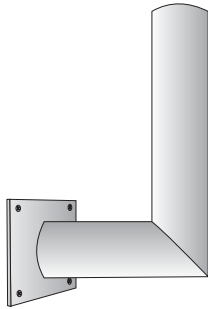


**L POLE
(FOR WALL)**

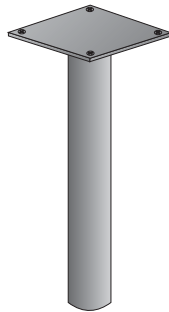

CEILING POLE

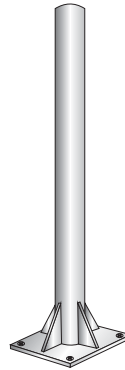


**GALVANIZED
IRON POLE**

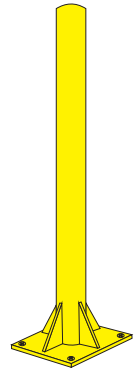


MILD STEEL POLE

INSTALLATION GUIDE


ENTRANCES & EXITS (CAR PARK)

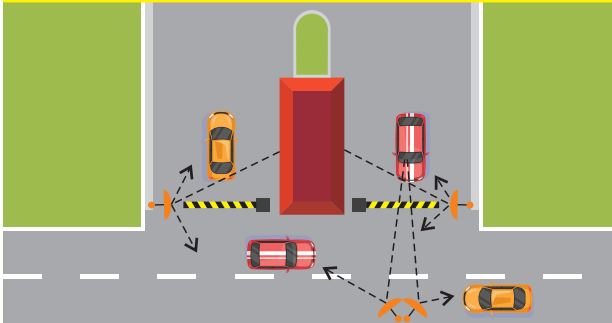


PREVENT MONITORING/SHOPLIFTING

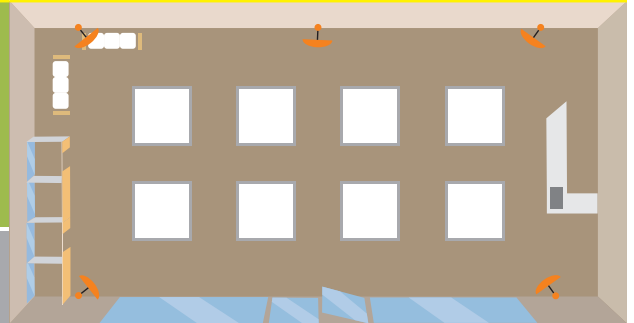

T JUNCTION

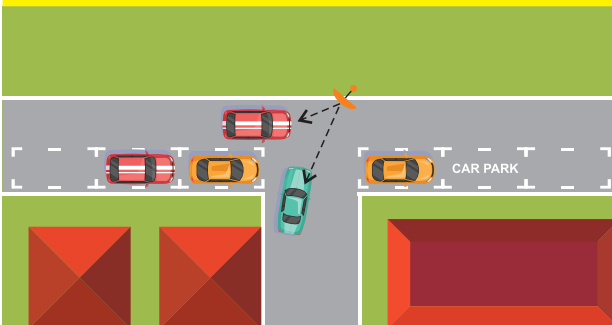

INCREASE PERSONAL SAFETY

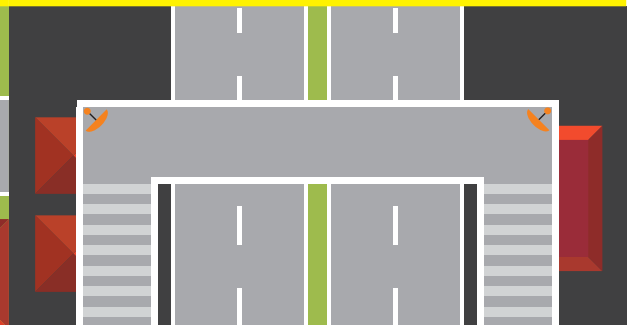


MATERIAL	STAINLESS STEEL	POLYCARBONATE
WEATHER RESISTANCE		
IMPACT RESISTANCE		
REFLECTIVENESS		
LIFESPAN (YEARS)	> 5 YEARS	< 2 YEARS
STAINLESS STEEL OVER OTHERS	THE REFLECTIVENESS OF STAINLESS STEEL INCREASE OVER TIME	

REMARKS:

 BEST
  GOOD
  NORMAL
  POOR
  VERY POOR

VIEWING DISTANCE VS MIRROR RADIUS & MIRROR SIZE SELECTION


Ø 600, RADIUS 1500 OR 2200MM

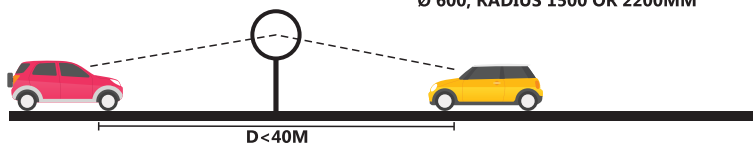

VIEWING DISTANCE LESS THAN 40M

APPROPRIATE MIRROR : Ø 600MM
 MIRROR RADIUS : 1500MM OR 2000MM


Ø 800, RADIUS 3000MM

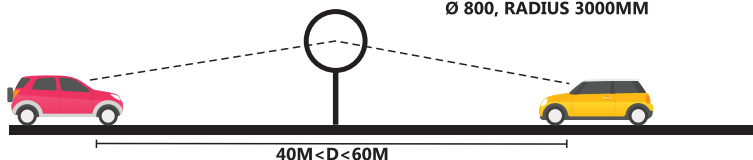

VIEWING DISTANCE IS BETWEEN 40M & 60M

APPROPRIATE MIRROR : Ø 800MM
 MIRROR RADIUS : 3000MM

Ø 1000, RADIUS 3000MM & ABOVE

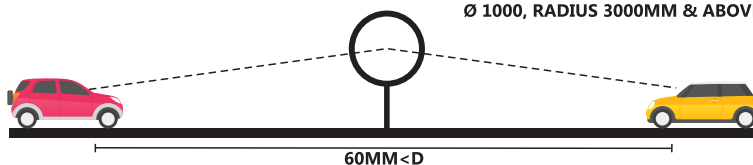

VIEWING DISTANCE MORE THAN 60M

APPROPRIATE MIRROR : Ø 1000MM
 MIRROR RADIUS : 3000MM & ABOVE

FULL - 360°



HALF - 180°



QUARTER - 90°




AVAILABLE IN THESE MATERIAL :

✓ ACRYLIC




INSTALLATION METHOD OF DOME MIRROR



FULL DOME
MIRROR 360°



HALF DOME
MIRROR 180°



QUARTER DOME
MIRROR 90°

	QUARTER-90°	HALF-180°	FULL-360°
SIZE (MM)	MODEL	MODEL	MODEL
300	AQDM-300	AHDM-300	AFDM-300
450	AQDM-450	AHDM-450	AFDM-450
600	AQDM-600	AHDM-600	AFDM-600
800	AQDM-800	AHDM-800	AFDM-800
1000	AQDM-1000	AHDM-1000	AFDM-1000

METAL EXPANDABLE BARRICADE C/W WHEEL



Durable, expand up to 2 meter with yellow/black colour

Model	UTEB-1S01
Size	Open(L) : 2300mm/Close(L) : 280mm
Height	103mm
Weight	8.0 kg
Footprint	Close: 450mm x 280mm

PLASTIC EXPANDABLE BARRICADE



Provided with reflective effect. Expand up to 2.5 meter. Can be injected with water to stable performance. Light weight making it easy to transport

Model	PEB
Size	960mm(H)
Weight	3.0 kg
Footprint	250mm x 400mm


PLASTIC EXPANDABLE BARRICADE C/W WHEEL



Easy to use, easy to maneuver highly visible mobile safety barrier, extend to 13 feet with articulating panels that can be set straight, curved, or in a circle

Model	PEB-W
Size	Open(L) : 3800mm/Close(L) : 320mm
Weight	16.0 kg
Footprint	300mm x 610mm


EXPANDABLE POLE

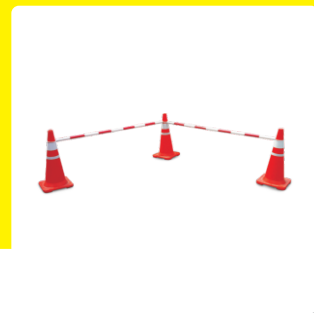

Light weight and extremely portable. Easy to setup or remove. Length of bar adjusts from 4" to 7"

Model	EPYB / EPRW
Size	Expand up to 2.5m
Weight	0.5 kg
Colour	Yellow/Black, Red/White

CROWD CONTROL BARRICADE

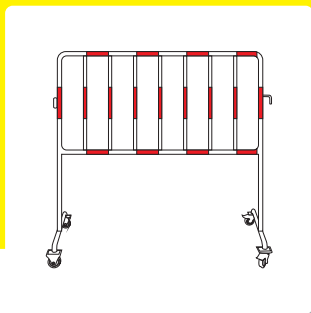

Used for concerts, sporting events and functions. Convenient to use & enhances caution effects

Model	MTB / MTB-W
Size	42(H) x 48(L)inch

VEHICLE DOLLY C/W HOLDER



This set of four hydraulic wheel dollies are designed to make it possible to move any vehicle by pivoting with two dollies or freely moving with four dollies

Model	UTPL-M01
Size	68 x 62 x 22cm
Weight	20.0 kg

SAFETY VEST HI-VIS



High Visibility reflective tape. Suitable for both day & night visibility

Model SV-VH4HG / SV-VH4OR

Size M / L / XL

Colour GREEN / ORANGE

SAFETY VEST MESH TYPE



Light weight, breathable mesh construction

Model SV-EMHG / SV-EMOR

Size M / L / XL

Colour GREEN / ORANGE

V-SHAPED REFLECTIVE SAFETY VEST



High Visibility reflective tape. Suitable for both day & night visibility

Model SV-V-Y

Size FREE SIZE

Colour YELLOW

PVC FLOOR SIGN



Two sided, imprinted multilingual. Attracts immediate attention. Pack flat for easy transport

Model SFS-PLAIN

Size 25inch (H)

Weight 0.9 kg

TRAFFIC FLAG FOR FLAGMAN



For flagman on traffic control

Model FLAG - R/G


Size 375mm x 280mm

Stick (L) 600mm

Colour Green / Red

Material Cotton

PLASTIC TRIANGLE REFLECTOR

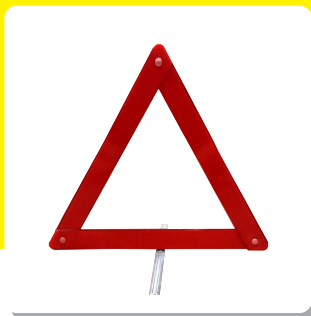

Warns the driver for occurs ahead. Foldable perfect for storage. Four legs have non-slip for secure placement

Model ST-TR/PLASTIC

Size 16 x 16 x 16cm

Weight 0.2 kg

REBOUNDABLE POLE



Very durable, high visible. Easy installation and low maintenance

Model	FP30-PU
Size	30 inch(H)
Weight	1.9 kg

LANE BLOCK



Used to separate lanes & preventing vehicles from entering an area/changing lanes. Good character of reflectivity

Model	RLB-800
Size	800mm(L) x 200mm(W) x 130mm(H)
Weight	Base : 12.0 kg/Post : 1.0 kg

RUBBER BOLLARD



Heavy duty control of your property or pedestrian

Model	BOLLARD-RB
Size	912mm(H)
Weight	17.0 kg

DELINEATOR POLE



Highly reflective grey band, makes it suitable for day and night use. Convenient T-top carry handle and bolt hole for hazard lamp attachment

Model	DP1100
Size	1100mm(H)
Weight	6.8 kg
Base	420mm x 420mm

WARNING POST



Very durable, high visible. Easy installation and low maintenance

Model	CC-E05-0
Size	800mm(H)
Weight	2.7 kg
Base	260mm(D)

STAINLESS STEEL BOLLARD



Semi dome stainless steel bollard, maintenance free and premium look

Model	BOLLARD-SUS
Size	100mm Ø x 1000mm(H)

PVC TRAFFIC CONE (HIGHWAY GRADE)



Water proof and heat-resistant, made by PE material. Easy to move and relocate

Model	TC-30R-PVC
Size	30 inch(H)
Weight	3.5 kg
Base	360mm x 360mm

ADAPTA BASE



Adapta cone with base that can be filled with water and sand. Increase stability and to withstand heavy wind impact

Model	ST-ADAPTA
Size	510mm x 510mm
Weight	5.0 kg

PE TRAFFIC CONE WITH SAND BASE



Water proof and heat-resistant, made by PE material.

Model	TC-30
Size	30 inch(H)
Weight	4.0 kg
Base	390mm x 390mm

PE TRAFFIC CONE WITH RUBBER BASE



PE material with black rubber base. Designed with reflective strip for high visibility

Model	TC-30R
Size	30 inch(H)
Weight	2.5 kg
Base	380mm x 380mm

COLLAPSIBLE CONE



Ideal for putting in the car boot or under your seat for emergency or maintenance work. Height adjustable and higher visibility

Model	RCS675
Size	24 inch
Weight	2.5 kg

RETRACTABLE CONE



Used for concerts, sporting events and functions. Convenient to use, enhances caution effects

Model	FTSC28
Size	28 inch
Weight	0.9 kg

REFLECTIVE DELINEATOR ROPE



It can be used to control crowds & to direct traffic or marking dangerous areas. Excellent visibility

Model RDP-Y / O / S

Size 50m (L)

Weight 0.5 kg

Colour Yellow / Orange / Silver

CONE CONNECTOR



Connector for plastic chain and cone topper. Fits on cones to be used to support chains

Model SCC-R / SCC-Y

Size 76mm - 87mm (Diameter)

PLASTIC CHAIN



Cones can be connected with a chain to create a large barrier. Durable & weatherproof, light weight washable

Model PLC-RD / YL

Size 6mm x 25m

Colour Red / Yellow

Reflective Delineator Rope

Cone Connector

Plastic Chain



RETRACTABLE BARRIER TAPE



Fixed on most standard traffic cones. Easy to set up or remove. Four ways connectivity for cordoning off a restricted area or building a temporary barrier

Model RBT

Size 250mm(H), 75mm(D)
3meter diagonal stripes belt

LED HAZARD WARNING LIGHT



Mounting on the standard traffic cones. Using extra LED design. Build in automatic light sensor switch. All weather waterproof function

Model WL-Y, WL-R, WL-B


SOLAR WARNING LIGHT



These warning lights are used in traffic system with the advancement of solar energy

Model HWL-S-AM

RUBBER CAR STOPPER



Ideal for indoor/outdoor application

Model	RCS-550
Size	550mm x 150mm x 100mm
Weight	4.5 kg

ECONOMIC RUBBER CAR STOPPER



Basic rubber car stopper

Model	UTWS-R006
Size	500mm x 150mm x 100mm
Weight	3.5 kg

FULL SIZE RUBBER CAR STOPPER



Full length car stopper, ideal for indoor/outdoor application

Model	RCS-183
Size	1830mm x 150mm x 100mm
Weight	17.0 kg


CONCRETE CAR STOPPER



Concrete car stopper ideal for outdoor application

Model	CCS
Size	101 (H) x 152 (W) x 609mm (L) 1830mm x 150mm x 100mm
Weight	19.0 kg+-

METAL/ALUMINIUM CORNER PROTECTOR



Corner protector are constructed from high impact resistance natural rubber. They are designed to protect the edges of columns/instructures

Model	MCP-AL / MCP-MS
Size	3" x 3" x 1000mm (MCP-MS) 100 x 100 x 1000mm (MCP-AL)

RUBBER CORNER PROTECTOR



Corner protector are constructed from high impact resistance natural rubber. They are designed to protect the edges of columns/instructures

Model	RCP
Size	800mm x 100mm x 10mm(T)
Weight	1.9 kg

YELLOW CORNER PROTECTOR



This yellow corner protector is ideal for protecting people, vehicles or equipment in warehouses, factories, parking and industrial areas

Model	RCP-Y
Size	100mm x 800mm x 10mm 100mm x 900mm x 10mm
Weight	2.0 kg / 2.3 kg


3M ALUMINIUM ROAD STUD



Provide the road users with brighter, impact and abrasion resistance for outdoor road safety

Model	RSDY-290AI
Size	101mm(W) x 91mm(L) x 23mm(H)
Weight	200g
Colour	AMBER/AMBER

ALUMINIUM ROAD STUD



Provide the road users with brighter, impact and abrasion resistance for outdoor road safety

Model	RSDY
Size	100mm(W) x 100mm(L) x 20mm(H)
Weight	400g
Colour	AMBER/AMBER

PLASTIC ROAD STUD



Provide the road users with brighter, impact and abrasion resistance for indoor road safety

Model	RSDY-PLASTIC
Size	100mm(W) x 100mm(L) x 20mm(H)
Weight	100g
Material	ABS

METAL DETECTOR



Automatic tuning. Using single 9 volt NiMH rechargeable battery. Up to 20 hours on each 12 hours recharge

Model	HMD-SS
Size	16 inch(L)
Weight	0.5 kg


INSPECTION MIRROR




12" round mirror ; Handles extend from 42" to 51" Aluminium handles, tripod ball bearing with caster wheels, LED flashlight with mounting bracket

Model	MR-SIM-V1
Size	12" round mirror ; Handles extend from 42" to 51"



FRONT VIEW



TOP VIEW



SIDE VIEW

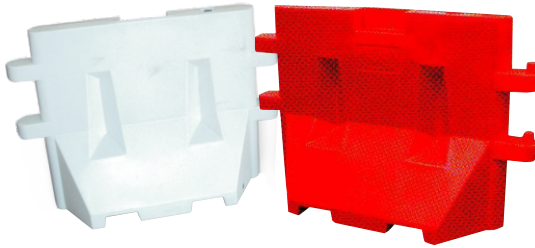


ROAD BARRIER

Model RB1M-W / RB1M-O
Size 800mm x 110mm x 500mm

High visibility, long term placement and water filled. Act a traffic safety barrier. The interlocking pin allows you to create curves/angles while creating a single solid wall

FRONT VIEW



TOP VIEW



SIDE VIEW




EXTEND HOARDING

Model HOARDING-O / HOARDING-W
Size 2220mm x 1000mm x 520mm

More durable and reliable, it provide maximum stability. Light weight and is visually more striking due to the bright color of the product

WHEEL CLAMP



Designed to prevent vehicles from being moved. Prevent your vehicles from theft. Designed to fit of wheel & tyres sizes

Model	(A) ST WHEEL CLAMP-BIG ST WHEEL CLAMP-SMALL
	(B) ST-ULOCK
Size	(A) 960mm(W) x 930mm(L)-BIG 850mm(W) x 630mm(L)-SMALL (B) 185mm(W) x 295mm(L)

T-SHAPE ADJUSTABLE PARKING LOCK



Designed to prevent vehicles from being moved. Prevent your vehicles from theft. Designed to fit of wheel & tyres sizes

Model	TAPL
Size	500 x 420 x 80mm
Weight	6.6 kg

WHEEL CHOCK



Provides maximum all-weather stopping power for transportation during maintenance, loading or emergency procedures. Eye bolt included

Model	ST-WC
Size	19cm(H) x 24cm(W)
Weight	5.5 kg

REMOTE PARKING LOCK



Designed to prevent vehicles from being moved. Prevent your vehicles from theft. Designed to fit of wheel & tyres sizes

Model	UTPL-T03
Size	480mm x 400mm x 75mm

HOLLOW RUBBER FENDER



It is resistant to all types of weather. These bumpers are used for edge protection, cushioning, and impact absorption to minimize the damage in case of collision

Model	RFH-D
Size	All sizes available upon request

SOLID TYPE RUBBER FENDER



It is resistant to all types of weather. These bumpers are used for edge protection, cushioning, and impact absorption to minimize the damage in case of collision

Model	RFH-R
Size	All sizes available upon request

RP.1  600 x 600mm	RP.2a  600mm Ø	RP.2b  600mm Ø	RP.3  600mm Ø	RP.4  600mm Ø	RP.5  600mm Ø
RP.6  600mm Ø	RP.10  600mm Ø	RP.11  600mm Ø	RP.14  600mm Ø	RP.15  600 x 600mm	TF005  600 x 600mm
TF006  600mm Ø	TF007  600mm Ø	TF008  600mm Ø	TF010  600mm Ø	TF011  600mm Ø	TF012  600mm Ø
TF006  600mm Ø	TF007  600mm Ø	RP.7  600mm Ø 500 x 170mm	RP.13  600mm Ø 500 x 170mm	GI.6  600mm x 900mm	GI.9  600mm x 900mm
GI.8  750 x 600mm	GI.4  530 x 530mm	RM.1a  600mm Ø	RM.1b  600mm Ø	RM.1c  600mm Ø	RM.1d  600mm Ø
RM.4  600mm Ø					

WD.2



WD.3



WD.4



WD.10a



WD.10b



WD.14



400 x 400mm | 600 x 600mm | 750 x 750mm

WD.16



WD.17



WD.18



WD.19



WD.20



WD.21



400 x 400mm | 600 x 600mm | 750 x 750mm

WD.22



WD.23



WD.25



WD.26



WD.27a



WD.27b



400 x 400mm | 600 x 600mm | 750 x 750mm

WD.27c



WD.27d



WD.27e



WD.28a



WD.28b



WD.29



400 x 400mm | 600 x 600mm | 750 x 750mm

WD.31



WD.32a



WD.32b



WD.33



WD.36



WD.37



400 x 400mm | 600 x 600mm | 750 x 750mm

WD.38a



WD.38b



TF001



TF002



WD.37



400 x 400mm | 600 x 600mm | 750 x 750mm

480 x 600mm
600 x 750mm

TT001



1200 x 800mm

TT002



1200 x 800mm

TT003



1200 x 800mm

TT004



1200 x 800mm

TT005



1200 x 800mm

TT006



1200 x 900mm

TT007



1200 x 1000mm

TT008



1200 x 1000mm

TT009




1200 x 1000mm

TT010



1200 x 1000mm

TT011



1500 x 900mm

TT012



1200 x 900mm

TT013



1200 x 700mm

TT014



1200 x 600mm

TT015



1200 x 800mm

TT016



1200 x 700mm

TT017



1200 x 700mm

TT018



1200 x 575mm

TT019



1200 x 500mm

TT020



1200 x 1200mm

TT021



1200 x 1200mm

TT022



1200 x 1200mm

TT023



600mm Ø
500 X 175mm

TT023



600mm Ø

TT023



600mm Ø

TT023



600 x 600mm
600 x 320mm

TT023



750 x 750mm

TT023



750 x 750mm

TT023



750 x 750mm

TT023



750 x 750mm
1000 x 250mm

